



- Supports Intel 12th/13th Gen processor (LGA1700) with Intel H610 chipset
- 2 x SO-DIMM DDR4
- 1 x M.2 2280 SSD Slot, Supports SATA/NVME SSD
- 4 x USB2.0, 4 x USB3.0
- 1 x M.2 2230 WIFI/BT slot, Supports WIFI 6
- Displays: 1 x VGA, 1 x HDMI,
- 12-19V DC in


Specification

Processor System	CPU	Intel® Adler Lake-S, LGA1700, TDP. MAX 65W
	Chipset	INTEL H610 PCH
	BIOS	AMI UEFI BIOS
Graphics	Chipset	Intel Xe Graphics
	Multi displays	Support Dual displays
	Interface	1 x VGA, 1 x HDMI
Memory	Type	2 x SO-DIMM DDR4
	Max	64GB
Ethernet	Lan IC	1 x Intel I219V
	Interface	10/100/1000Mbps
	Connector	1 x RJ45
Wireless	Type	Wi-Fi/BT module, Supports 802.11 b/g/n/ac/ax
	Interface	1 x M.2 2230
Storage	Type	SSD
	Interface	1 x M.2 2280 for PCIE 4X/SATA SSD, 1 x SATA
IO Interface	Rear panel	1 x HDMI2.0, 1 x VGA (Option COM) 4 x USB 2.0 , 4 x USB 3.0 1 x RJ45 2 x 3.5mm Audio Jack: 1 x MIC IN, 1 x LINE OUT 2 x Wi-Fi/BT ANT 1 x DC Jack
	Front panel	2x3.5mm Audio Jack: 1 x MIC IN, 1 x Line out 4 x USB2.0 1 x Power button, 1 x Power LED
Software	OS Supports	Windows 10/Windows 11/LINUX
	Watchdog	support
	VPro/AMT	No support
Power	TPM	No support
	Power input	12~19V DC IN, 2.5/5.5 DC Jack
Size	Size	210 x 210 x 56 mm
Environment	Operating Temp.	-5~45°C
	Operating Humidity	10%~90% non-condensing
	Storage Temp.	-20~70°C
	Operating Humidity	5%~95% non-condensing

View



Size

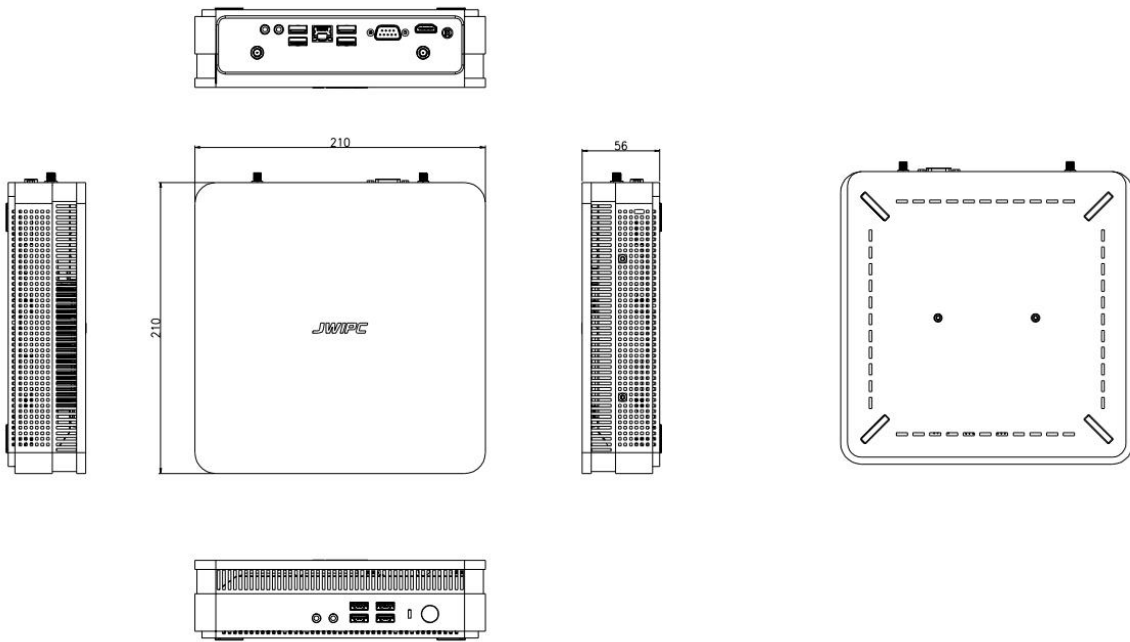

Information

102- 3	3-12100/	2	/	-	4/	6	50	/	20/
102- 5	5-12400/	2	/	-	4/	6	50	/	20/